


- Compatible with all .300 Win. Mag. bolt action weapons
- Unique combination of excellent accuracy with maximum penetration
- Same trajectory as Ball/Styx Action/Target

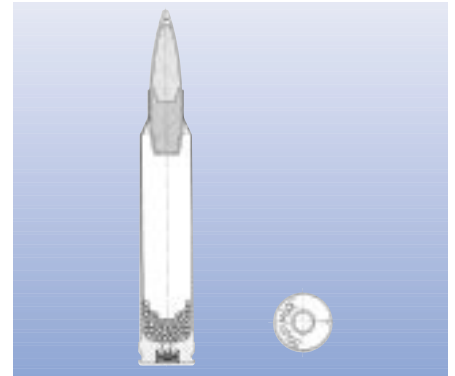

Application:

Maximum penetration to overcome armoured targets which are protected by vests, bulletproof glass, light armour, and other cover. The SWISS P projectile with a tungsten carbide penetrator of a new de-

sign (patented bullet) will defeat armour targets, even at a long range. With matching trajectory, the SWISS P Armour Piercing cartridge will penetrate the hardened target with precision fire.

Cartridge Data

• weight:	33 g
• case material:	CuZn - alloy
• primer:	large rifle magnum
• propellant:	single base
• projectile:	FMJHC
• ballistic coefficient C1:	0.625 (ICAO)
• projectile weight:	196 grs / 12.7 g
• jacket material:	CuZn - alloy
• core material:	WCCo + PbSn - alloy
• dimensions:	in accordance with CIP
• marking:	black tip

Technical Data

• temperature range:	between -54 °C and +52 °C
• muzzle velocity:	min. 855 m/s
• mean chamber pressure:	max. 4300 bar
• accuracy 100 m:	100 % radius 21 mm, 10 rounds
• accuracy 300m:	100 % radius 63 mm, 10 rounds
• penetration 250m:	12 mm steel + 21 layers kevlar at an angle of 0°
• penetration 500m:	body armour class 4++ at an angle of 0°

Packaging and Marking

In accordance with customers' requirements